




Name of article	FLOW x GLOW	Secondary backing ISO 2424	Action back
Method of production ISO 2424	Tufted	Electrostatic loading ISO 6356	<2 KV
Width ISO 3018	ca. 400	Surface resistivity ISO 10965 ROT	10 ⁹ Ω
Surface structure ISO 2424	Loop	Transparency to heat ISO 8302	0,09 K*m ² /W
Colourways	Mix	Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100% Econyl by Aquafil	Water fastness EN ISO 105 E01	≥ 4
Primary backing ISO 2424	PET	Friction fastness EN ISO 105-X12	≥ 3-4
Overall weight ISO 8543	ca. 1740 g/m ²	Stitch rate ISO 1763	ca. 99500/m ²
Overall thickness ISO 1765	ca. 5.5 mm		
Pile service weight	ca. 680 g/m ²		

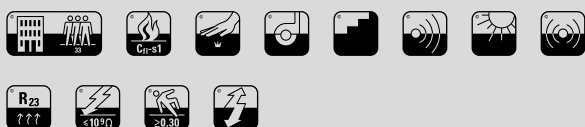


EN 14041 | DOP: 1060-OC-3547
CPR: 1658-CPR-3547 | NB: 1658

Health-promoting properties AIR



- Free from PVC and bitumen.
- Free from formaldehyde.
- Reduction of fine dust in the breathing air.
- Free from harmful emissions and odors.
- TVOC limits are immediately met.
- Suitable for allergy sufferers

HEALTH



Health-promoting ACOUSTIC properties



- Improved impact sound insulation +23dB
- Enhanced room acoustics +0.2α_w

Hz	125	250	500	1000	2000	4000
α _s	0,01	0,03	0,08	0,20	0,35	0,64

- Increased employee concentration and motivation through enhanced well-being
- Acoustically effective

Environmental properties

PRODIS-ID | product pass

- 100% recycled yarn
- Recycled primary backing
- Easy cleaning with water only



Product Information

The design of the tufting creates a fabric-like surface appearance. The delayed regeneration behavior of the loop quality is typical of the fabric. Indentations in the fibers recover after a short period of frequent use.

Installation Instructions

The seam is cut professionally from above within the nap alley using a seam cutter (e.g. from Mittag). During this work process, it must be ensured that the nap alley is not left during cutting.



Made in Europe (production according to EU standard)