
Characteristic features EN 1307

Name of article Method of production ISO 2424 Width ISO 3018 Surface structure ISO 2424 Colourways Pile material ISO 2424 Primary backing ISO 2424 Overall weight ISO 8543 Overall thickness ISO 1765 Pile service weight	FORUM Glossy Velours Tufted ca. 400 Cut Style 100% PA 6.6 PES ca. 2280 g/m ² ca. 10,5 mm ca. 1150 g/m ²	Secondary backing ISO 2424 Electrostatic loading ISO 6356 Surface resistivity ISO 10965 ROT Transparency to heat ISO 8302 Light fastness ISO 105-B02 Water fastness EN ISO 105 E01 Friction fastness EN ISO 105-X12 Stitch rate ISO 1763	Welltex Circular® Acoustic < 2 KV 10 ⁹ Ω 0,09 K*m ² /W ≥ 5 ≥ 4 ≥ 3-4 ca. 150.000/m ²
		C E EN 14041 DOP: 1060-OC-3548 CPR: 1658-CPR-3548 NB: 1658	

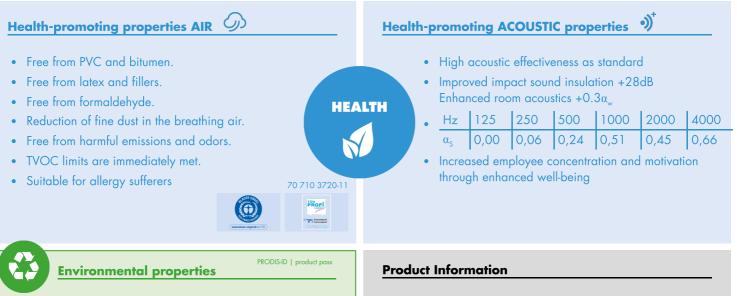

- Completely recyclable
- Recycled primary backing
- 100% recycled secondary backing
- Easy cleaning with water only

The voluminous velour with a velvety look and glossy effects is characterized by deliberately incorporated iridescent shadows that reveal a varying fibre level. This unique property gives the carpet a special characteristic and is deliberately integrated into the design.

Installation Instructions

The seam is cut from the back of the fabric using a floor layer's knife with a hooked blade along a steel rail. Only the back construction should be severed in the process.



Data status 30.06.2025. Subject to changes due to technical advancements.

