

## Characteristic features EN 1307



Name of article	<b>AT Route</b>	Secondary backing ISO 2424	
Method of production ISO 2424	Getuftet	Electrostatic loading ISO 6356	< 2 KV
Width ISO 3018	ca. 25x100	Surface resistivity ISO 10965 ROT	10 <sup>9</sup> Ω
Surface structure ISO 2424	Velours	Transparency to heat ISO 8302	0,09 K*m <sup>2</sup> /W
Colourways		Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100 % Polyamid Alto <sup>®</sup>	Water fastness EN ISO 105 E01	4
Primary backing ISO 2424	PES	Friction fastness EN ISO 105-X12	≥ 3-4
Overall weight ISO 8543	ca. 4200 g/m <sup>2</sup>	Stitch rate ISO 1763	ca. 205000/m <sup>2</sup>
Overall thickness ISO 1765	ca. 7.8 mm		
Pile service weight	ca. 500 g/m <sup>2</sup>		



EN 14041 | DOP: 1060 OC 3381 | NB: 1658

### Health-promoting properties AIR

- Free from PVC and bitumen.
- Free from formaldehyde.
- Reduction of fine dust in the breathing air.
- Free from harmful emissions and odors.
- TVOC limits are immediately met.
- Suitable for allergy sufferers



### Health-promoting ACOUSTIC properties

- High acoustic effectiveness as standard
- Improved impact sound insulation +25dB
- Enhanced room acoustics +0.2 $\alpha_w$

Hz	125	250	500	1000	2000	4000
$\alpha_s$	0,01	0,01	0,08	0,19	0,35	0,38


- Increased employee concentration and motivation through enhanced well-being



### Environmental properties

EE014AE7  
PRODIS-ID | product pass

- Completely recyclable
- Recycled primary backing
- 100% recycled secondary backing
- Weight reduction of up to 50%
- Easy cleaning with water only

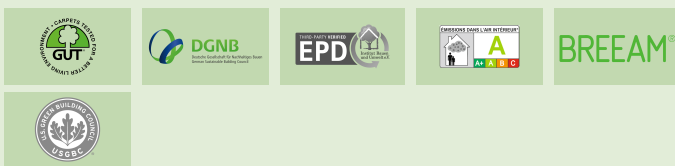

Made in Europe (production according to EU standard)

### Product Information

### Installation Instructions