

Characteristic features EN 1307



|                               |                            |                                   |                            |
|-------------------------------|----------------------------|-----------------------------------|----------------------------|
| Name of article               | AT Scor 550                | Secondary backing ISO 2424        | Bitumen Schwerbeschichtung |
| Method of production ISO 2424 | Needled                    | Electrostatic loading ISO 6356    | < 2 KV                     |
| Width ISO 3018                | ca. 50x50                  | Surface resistivity ISO 10965 ROT | 10 <sup>9</sup> Ω          |
| Surface structure ISO 2424    | Needle-felt                | Transparency to heat ISO 8302     | 0,09 K*m <sup>2</sup> /W   |
| Colourways                    | Uni                        | Light fastness ISO 105-B02        | ≥ 5                        |
| Pile material ISO 2424        | 35% PA / 40% PP / 25 % PES | Water fastness EN ISO 105 E01     | ≥ 4                        |
| Primary backing ISO 2424      | PES                        | Friction fastness EN ISO 105-X12  | ≥ 3-4                      |
| Overall weight ISO 8543       | ca. 4400 g/m <sup>2</sup>  | Stitch rate ISO 1763              | ca. /m <sup>2</sup>        |
| Overall thickness ISO 1765    | ca. 6,5 mm                 |                                   |                            |
| Pile service weight           | ca. 465 g/m <sup>2</sup>   |                                   |                            |



EN 14041 | DOP: 1045-120912  
CPR: CE-System 3 | NB: 1658

Health-promoting properties AIR

- Free from formaldehyde.
- Reduction of fine dust in the breathing air.
- Free from harmful emissions and odors.
- TVOC limits are immediately met.
- Suitable for allergy sufferers



Health-promoting ACOUSTIC properties


- High acoustic effectiveness as standard
- Improved impact sound insulation +20dB
- Enhanced room acoustics +0.2α<sub>w</sub>
- | Hz             | 125  | 250  | 500  | 1000 | 2000 | 4000 |
|----------------|------|------|------|------|------|------|
| α <sub>s</sub> | 0,02 | 0,02 | 0,07 | 0,20 | 0,42 | 0,45 |
- Increased employee concentration and motivation through enhanced well-being



Environmental properties

225F34D3  
PRODIS-ID | product pass

- Completely recyclable
- Recycled primary backing
- 100% recycled secondary backing
- Weight reduction of up to 50%
- Easy cleaning with water only

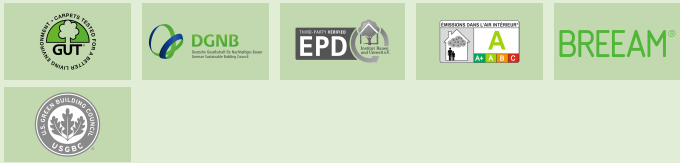

Made in Europe (production according to EU standard)

Product Information

Installation Instructions