

## **Characteristic features EN 1307**

Method of production ISO 2424TuftedWidth ISO 3018ca. 400Surface structure ISO 2424CutColourwaysUniPile material ISO 2424100% PA 6.6Primary backing ISO 2424PES	Secondary backing ISO 2424 Electrostatic loading ISO 6356 Surface resistivity ISO 10965 ROT Transparency to heat ISO 8302 Light fastness ISO 105-B02 Water fastness EN ISO 105 E01 Friction fastness EN ISO 105-X12 Stitch rate ISO 1763	Welltex® Acoustic < 2 KV 10 <sup>9</sup> Ω 0,09 K*m <sup>2</sup> /W ≥ 5 ≥ 4 ≥ 3-4 ca. 150.000/m <sup>2</sup>
--	---	---

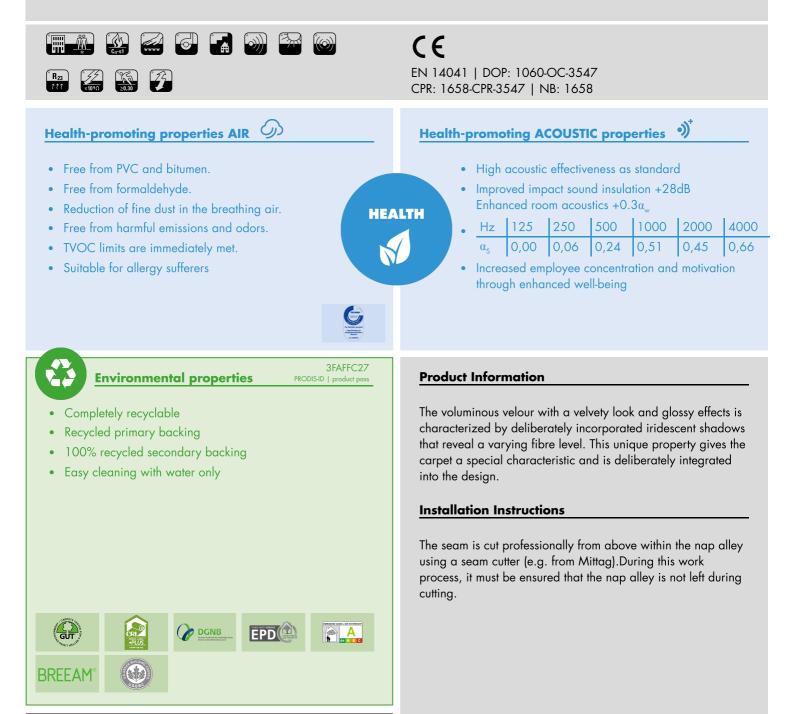

Data status 30.06.2025. Subject to changes due to technical advancements.



Made in Europe (production according to EU standard)

