
Characteristic features EN 1307

Name of article	Structures 700	Secondary backing ISO 2424	Action back
Method of production ISO 2424	Flat woven	Electrostatic loading ISO 6356	< 2 KV
Width ISO 3018	са. 400	Surface resistivity ISO 10965 ROT	
Surface structure ISO 2424	Loop	Transparency to heat ISO 8302	0,09 K*m² /W
Colourways	Mix	Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100% PA 6.6	Water fastness EN ISO 105 E01	\geq 4
Primary backing ISO 2424	PA, PES	Friction fastness EN ISO 105-X12	\geq 3-4
Overall weight ISO 8543	ca. 2200 g/m²	Stitch rate ISO 1763	ca. 188.000/m²
Overall thickness ISO 1765	ca. 4,0 mm		
Pile service weight	ca. 750 g/m²		



OBJECT CARPET GmbH | Marie-Curie-Strasse 3 | D-73770 Denkendorf Fon +49 (0) 711 / 34 02-0 | technicalsupport@object-carpet.com Data status 30.06.2025. Subject to changes due to technical advancements.

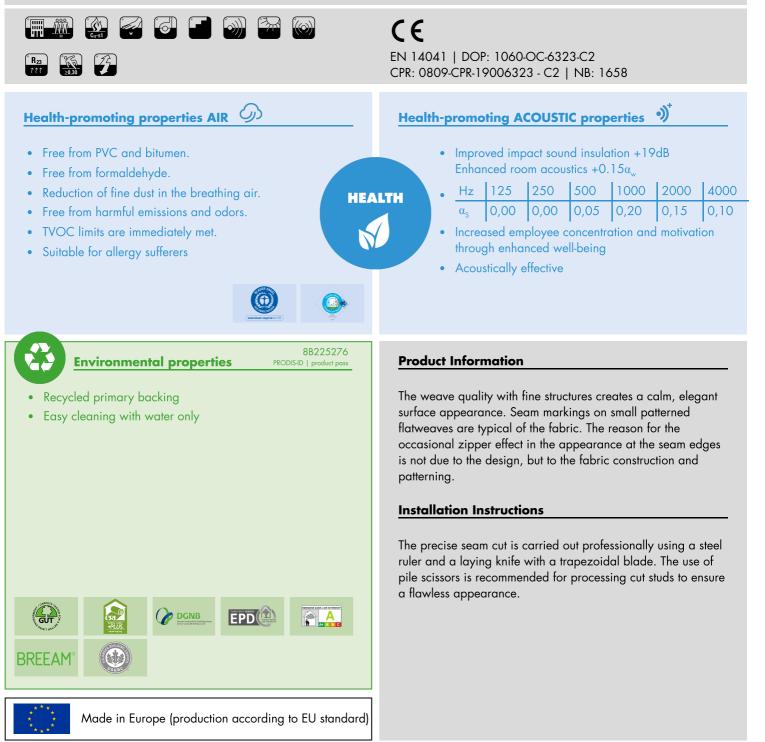