

Characteristic features EN 1307



Name of article	Web Uni 400	Secondary backing ISO 2424	Welltex® Acoustic Plus
Method of production ISO 2424	Flat woven	Electrostatic loading ISO 6356	< 2 KV
Width ISO 3018	ca. 400	Surface resistivity ISO 10965 ROT	10 ⁹ Ω
Surface structure ISO 2424	Loop	Transparency to heat ISO 8302	0,09 K*m ² /W
Colourways	Mix	Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100% PA 6.6	Water fastness EN ISO 105 E01	≥ 4
Primary backing ISO 2424	PES	Friction fastness EN ISO 105-X12	≥ 3-4
Overall weight ISO 8543	ca. 2300 g/m ²	Stitch rate ISO 1763	ca. 156.000/m ²
Overall thickness ISO 1765	ca. 4,50 mm		
	ca. 560 g/m ²		



EN 14041 | DOP: 1060 OC 6323-C2 | NB: 1658

Health-promoting properties AIR

- Free from PVC and bitumen.
- Free from formaldehyde.
- Reduction of fine dust in the breathing air.
- Free from harmful emissions and odors.
- TVOC limits are immediately met.
- Suitable for allergy sufferers



Health-promoting ACOUSTIC properties

- High acoustic effectiveness as standard
- Improved impact sound insulation +20dB
- Enhanced room acoustics +0.2α_w

Hz	125	250	500	1000	2000	4000
α _s	0,00	0,05	0,20	0,25	0,10	0,15


- Increased employee concentration and motivation through enhanced well-being



Environmental properties

3CA434F3
PRODIS-ID | product pass

- Completely recyclable
- Recycled primary backing
- 100% recycled secondary backing
- Easy cleaning with water only

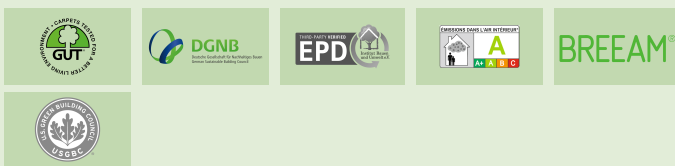

Product Information

The finely mottled weave quality creates a natural, subtle surface appearance. Seam markings on small-patterned flatweaves are typical of the fabric. The reason for the occasional zipper effect in the appearance at the seam edges is not due to the design, but to the fabric construction or patterning.

Installation Instructions

The precise seam cut is carried out professionally using a steel ruler and a laying knife with a trapezoidal blade. The use of pile scissors is recommended for processing cut studs to ensure a flawless appearance.



Made in Europe (production according to EU standard)