


Characteristic features EN 1307

Name of article	AT Web Code 400	Secondary backing ISO 2424	Welltex® Acoustic
Method of production ISO 2424	Flat woven	Electrostatic loading ISO 6356	< 2 KV
Width ISO 3018	ca. 50x50	Surface resistivity ISO 10965 ROT	
Surface structure ISO 2424	Loop	Transparency to heat ISO 8302	0,09 K*m² /W
Colourways	Mix	Light fastness ISO 105-B02	≥ 5
Pile material ISO 2424	100% PA 6.6	Water fastness EN ISO 105 E01	≥ 4
Primary backing ISO 2424	PES	Friction fastness EN ISO 105-X12	≥ 3-4
Overall weight ISO 8543	ca. 3025 g/m²	Stitch rate ISO 1763	ca. 156.000/m²
Overall thickness ISO 1765	ca. 5,0 mm		
Pile service weight	ca. 560 g/m²		

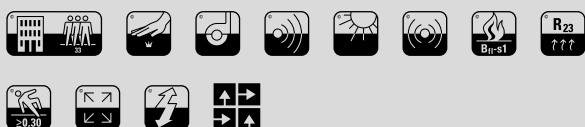

EN 14041 | DOP: 1060-OC-6323-C3
CPR: 0809-CPR-19006323-C3 | NB: 1658

Health-promoting properties AIR

- Free from PVC and bitumen.
- Free from formaldehyde.
- Reduction of fine dust in the breathing air.
- Free from harmful emissions and odors.
- TVOC limits are immediately met.
- Suitable for allergy sufferers

HEALTH

Health-promoting ACOUSTIC properties

- High acoustic effectiveness as standard
- Improved impact sound insulation +20dB
- Enhanced room acoustics +0.2 α_w

Hz	125	250	500	1000	2000	4000
α_s	0,01	0,01	0,08	0,20	0,28	0,32

- Increased employee concentration and motivation through enhanced well-being

Environmental properties

1EEACB9B
PRODIS-ID | product pass

- Completely recyclable
- Recycled primary backing
- 100% recycled secondary backing
- Weight reduction of up to 50%
- Easy cleaning with water only

Product Information

AT WEB CODE - This carpet tile captivates with a woven loop construction in a mottled design, bringing forth an elegant appearance. The choice of color plays a crucial role in the visibility of the tiles as well as the maintenance effort. Lighter shades may increase sensitivity. A particular criterion is the potential visibility of the seam pattern.

Installation Instructions

It is important to select the appropriate laying pattern (e.g., Chessboard) to achieve the desired visual effect.



Made in Europe (production according to EU standard)

Data status 30.06.2025. Subject to changes due to technical advancements.